


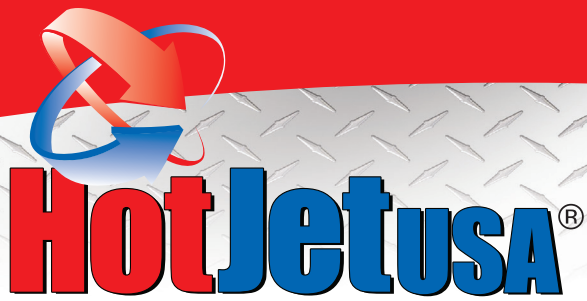


XF2LNG1240CW - 12 GPM @ 4,000 PSI (+/- 5%)


TRUCK / VAN MOUNTED JETTER COLD WATER OPERATION

11-17-2023

- 35HP Engine
- 12GPM @ 4,000 PSI
- Emperor Series Premium General Pump
- 66" L x 50" T x 42" W

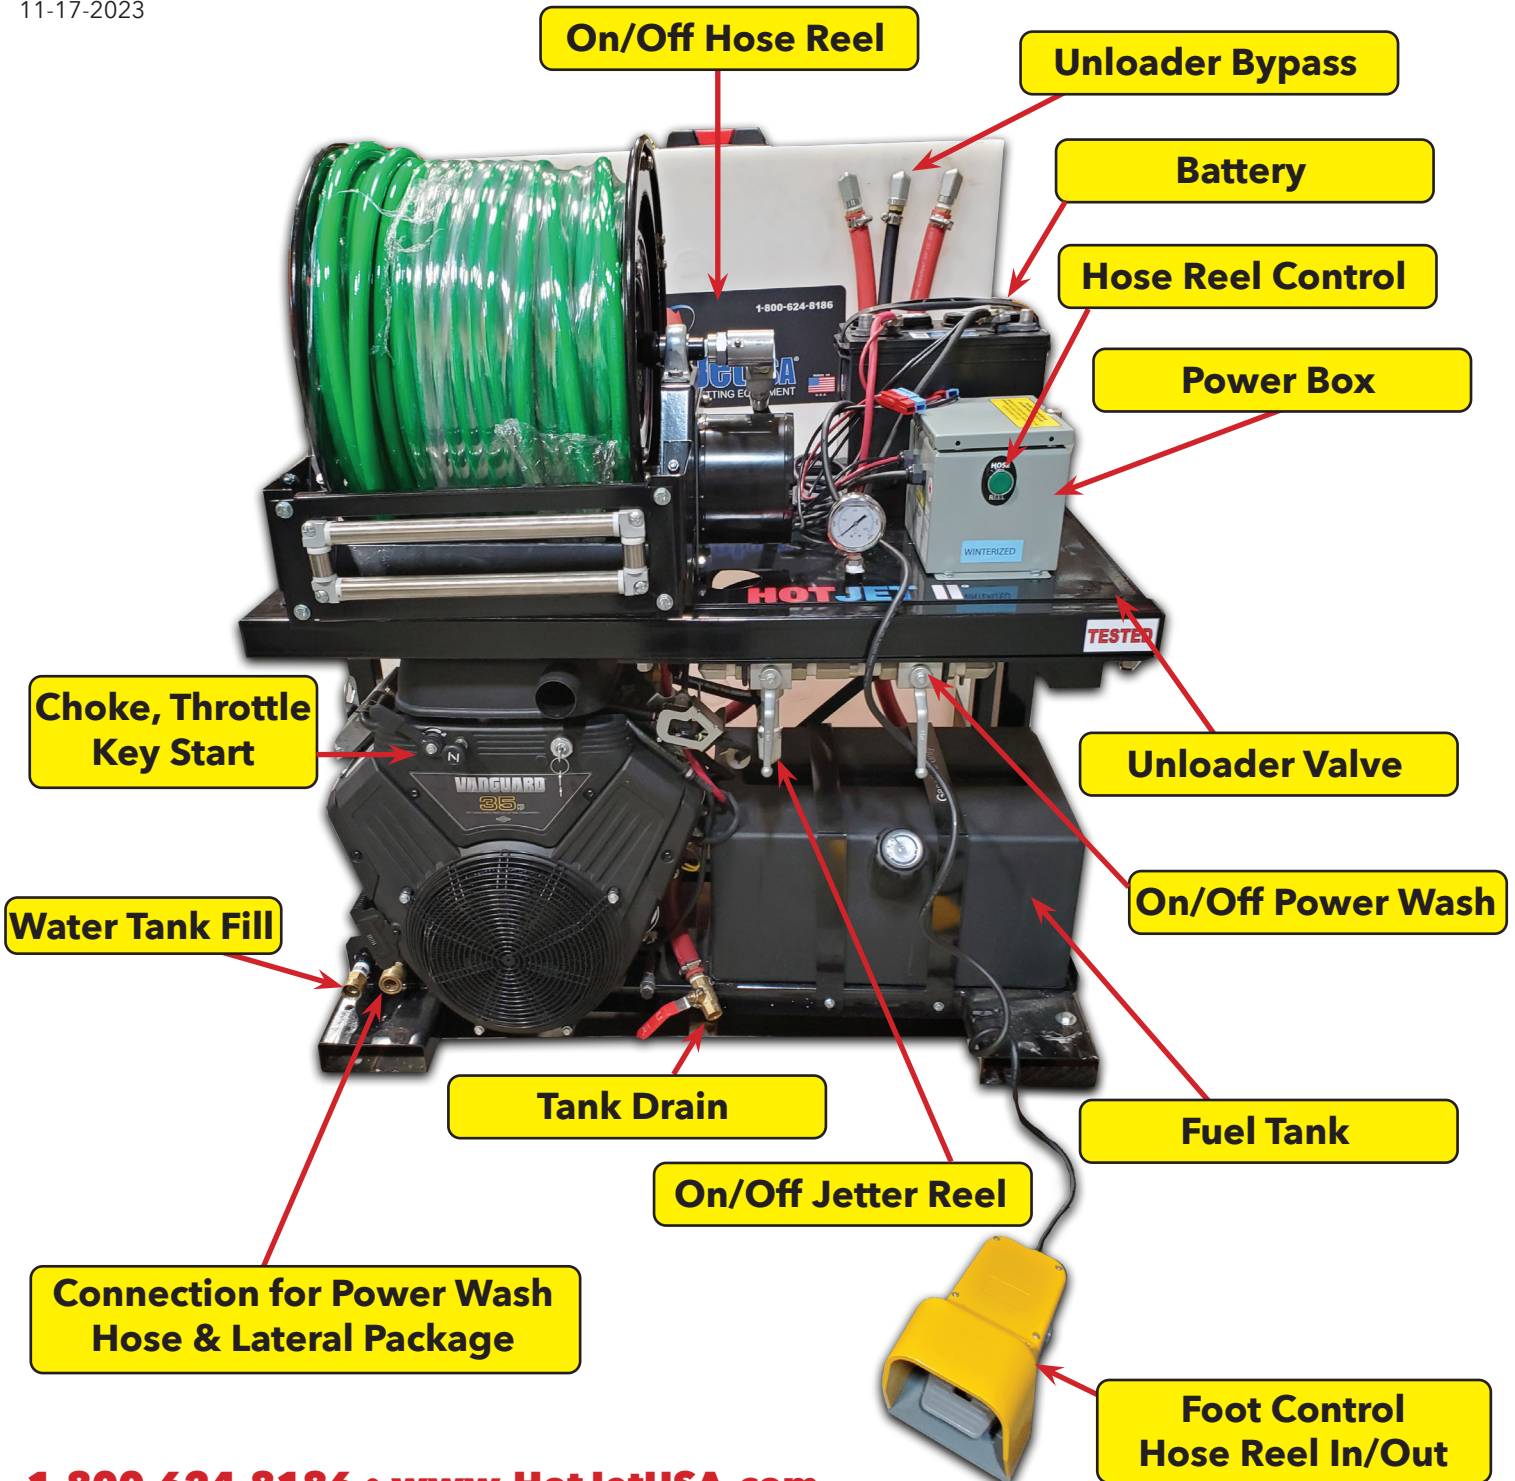

1.800.624.8186 • www.HotJetUSA.com

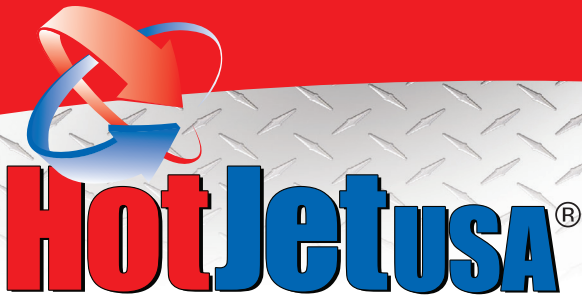

Read the following instructions carefully before attempting to assemble, install, operate or service this pressure washer. Failure to comply with these instructions could result in personal injury and/or property damage.

This Custom Portable Jetter is designed to be transported in a pickup truck or the side or rear door of a van.

Startup:

- ☐ Ensure all ball valves are closed prior to starting machine.
- ☐ Fill the 200 gallon tank with water.
- ☐ If power washing or using lateral package, connect the pressure wand assembly.
- ☐ Open ball valve to 10 gallon fuel tank and start engine to run the pump.
- ☐ If you are using the jetter hose, press on the foot pedal or button on electrical box to reel hose in to desired length.
- ☐ When storing: Do not store this machine in temperatures below 0°C (32°F) or winterize.
- ☐ Read the owner's manual and all other included component manuals prior to operating this machine; these manuals contain important information about safety hazards, proper setup, and maintenance.




XF2LNG1240CW - 12 GPM @ 4,000 PSI (+/- 5%)

START POSITION

**BYPASS
POSITION**

**FEEDS JETTER
REEL
POSITION**

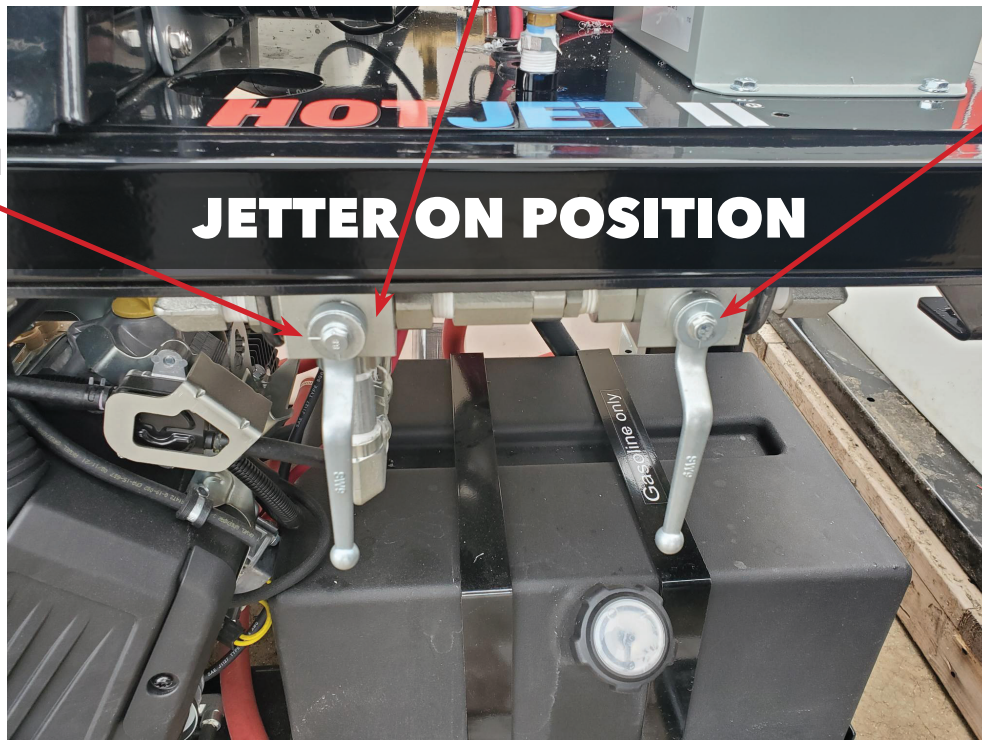


JETTER ON POSITION

**WATER
FLOW
ON**

**FEEDS
POWER WASH
CONNECTION**



POWER WASHER ON POSITION

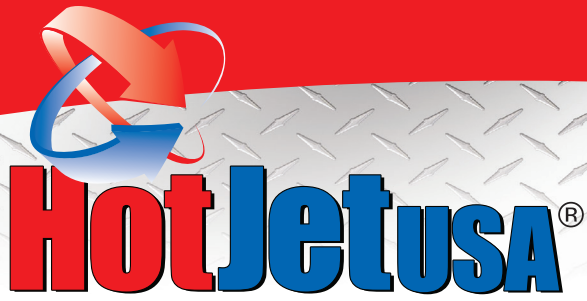


XF2LNG1240CW - 12 GPM @ 4,000 PSI (+/- 5%)



BE SURE TO TEST ANTI-FREEZE STRENGTH.

ANTI-FREEZE VALVE (OFF POSITION)

To anti-freeze, open anti-freeze valve and close water valve. Run anti-freeze until discharges from hose - shut off flow valve to jetter reel or power wash discharge. Continue to run for 2 seconds - unit is anti-frozen.

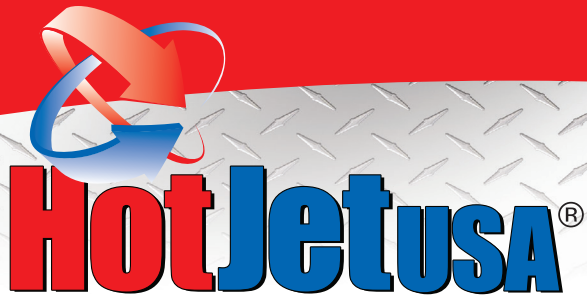

XF2LNG1240CW - 12 GPM @ 4,000 PSI (+/- 5%)



WATER CONTROL VALVE & WATER FILTER

Open water valve when running machine. Close valve and open anti-freeze valve when winterizing.

IMPORTANT SAFETY INFORMATION

ALL CAUTIONS AND SAFETY WARNINGS MUST BE FOLLOWED TO AVOID INJURY OR DAMAGE TO EQUIPMENT.

THIS EQUIPMENT IS TO BE USED ONLY BY TRAINED OPERATORS AND MUST ALWAYS BE ATTENDED DURING OPERATION.



WARNING: To reduce the risk of injury, read operating instructions carefully before using.

1. Read the instructions in this manual carefully before attempting to assemble, install, operate or service this pressure washer. Failure to comply with the instructions could result in personal injury and/or property damage.



WARNING: Trigger gun kicks back. Hold with both hands.

2. Hold firmly to the gun and wand during start up and operation of the machine.

3. Do not attempt to make adjustments while the trigger gun is in operation. Make sure all quick coupler fittings are properly secured before operating pressure washer.



WARNING: Keep water spray away from electrical wiring.

4. All electrically powered equipment must be grounded at all times to prevent fatal electric shocks. Do not spray water on or near electrical components. Do not touch electrical components while standing in water or when hands are wet. Always make sure machine is disconnected from power source before servicing.



WARNING: Risk of injection or severe injury to persons. Keep clear of nozzle spray.

5. High pressure spray can cause serious injuries. Never point pressurized spray at any person or animal. Handle the spray assembly with care.



WARNING: Risk of injury from falls when using ladder.

6. Do not overreach or stand on anything unstable. Keep a good balance and make sure to keep a steady footing at all times.



WARNING: Protect from freezing.

7. It is important to keep your machine from freezing in order to keep it in its best working condition. Failure to protect your machine from freezing may cause damage to the machine and personal injuries may occur as a result.

8. **WARNING: Keep hands clear from belt guard and other moving parts. DO NOT OPERATE MACHINE WITH BELT GUARD REMOVED.**

9. Protect high pressure hoses from sharp objects and vehicles. Inspect condition of hoses prior to use, or serious injury could occur.

10. Do not pass acids or other caustic or abrasive fluids through the pump.

11. Do not attempt to operate this machine if fatigued or under the influence of alcohol, prescription medications, or drugs.

12. Some of the maintenance procedures involved in this machine require a certified technician (these steps are indicated throughout this manual). Do not attempt to perform these repairs if you are not qualified.



WARNING: Use protective eyewear and clothing when operating equipment in order to avoid personal injuries.



WARNING: This machine exceeds 85db. Appropriate ear protection must be worn.

 WARNING
CALIFORNIA Proposition 65

Detectable amount of chemicals known to the State of California to cause cancer, birth defects or other reproductive harm may be found in pressure washing equipment, accessories and exhaust.

California Health and Safety Code 25249.5

For More Information Visit

www.p65warnings.ca.gov

D01-00612